

Superb Performance, Exceptional Value

Drawing from years of experience and industry leading technologies like Complex Conic waveguides, CA/CX loudspeakers are designed to meet the needs of today's Installed-AV professionals, with a broad range of systems to provide effective solutions for every sound reinforcement challenge at competitive price points.

The new C Series loudspeakers incorporate the newest generation of Complex Conic horns, with the latest drivers to provide clean, natural sound and tight pattern control. Unlike conventional loudspeaker designs, Complex Conic horns provide consistent beamwidth over a wider frequency range, with the natural, transparent sound that Renkus-Heinz is known for. And as with all Renkus-Heinz products, C Series loudspeakers are backed by Renkus-Heinz's renowned worldwide customer support.

Applications

- The CX/CA61 is a compact, 6" Complex Conic loudspeaker perfect for any application where very small size, consistent directivity and great sonic performance are required.
- Side fill or under balcony applications in House of Worship
- Foreground music systems
- High quality distributed sound systems
- Monitoring and fold back applications

Compact Design, Sizable Performance

The CX/CA61 was developed for applications needing consistent directivity and great sonics from a very compact cabinet.

It features a 1.4" voice coil high frequency compression driver with a 1" throat coupled to a Complex Conic horn. The patented Complex Conic horn eliminates high frequency beaming and provides wide angle coverage out to 20 kHz and beyond. The high-efficiency 6" woofer produces a strong low end. Together these deliver a surprisingly high 120 dB peak output level from 100 Hz to 20 kHz.

Designed In Flexibility

Twelve M6 Universal Mounting Points and 10 mm u-bracket mounting plates make installation easy and clean. The Complex Conic horn is field rotatable allowing the installer the flexibility of installing the loudspeaker either vertically or horizontally while maintaining the dispersion necessary for the project.

The CX/CA61 and it's (optional) matching U-Bracket are available in either white or black paint allowing them to blend into most environments.

Available externally powered or with four flavors of built-in amplification; RHAON II networking, monitoring and control, and Dante digital audio, the CX/CA61 brings new levels of versatility to compact loudspeakers.

CA/CX Series

CX61	Non-Powered
CA61-A	Powered, Analog
CA61-RN	RHAON Empowered
CA61-RD1	RHAON & Dante
CA61-RD	RHAON & Dante Redundant

6" LF + 1" HF Two-way, Complex Conic Loudspeaker



- **Complex Conic Horn**
Consistent directivity, superior sonics and field rotatable.
- **Surprising Power**
100 Hz to 20 kHz response and 120 dB, peak SPL.
- **Very Compact**
Just 16 x 7-7/8 x 9-3/8 inches/406 x 200 x 254 mm.
- **Optional U-Bracket Mount**
Allows easy horizontal mounting and aiming.
- **Available SA625 Amplifier**
SA625 amplifier offers high output, full protection limiting, analog, and optional AES and Dante inputs.


CA/CX61 Specifications

	CX61	CA61-A	CA61-RN	CA61-RD1 & RD
Connectors:	2 x Speakon® NL4 Four-place terminal strip, all paralleled	2 x XLR-3, In & Loop-out	2 x XLR-3, In & Loop-out, Analog and AES 2 x RJ45, primary & secondary	
Sensitivity:	94 dB (1W/1m)		1.0 volt for rated output, analog	
Power Handling:	Passive: 100 W AES @ 16 ohms, Bi-amp: 100 W AES @ 16 ohms, LF 20 W AES @ 16 ohms, HF		See SA625 amplifier specs below	
Weight:	20 lbs/9 kg		19 lbs/8.6 kg (<i>This is correct, the amp is lighter than the passive input connection/crossover plate.</i>)	
Crossover Frequency:	2.2 kHz, passive, bi-amp selectable		2.2 kHz active electronic	
Frequency Response:		100 Hz to 20 kHz (+/- 3dB)		
Max. SPL:		120 dB (peak, whole space)		
Dispersion		150° horizontal x 60° vertical, Rotatable Complex Conic Horn		
Enclosure:		11 ply birch plywood		
Grille:		16 GA powder-coated, plated steel		
Transducers:		Woofer: SSL6.5-18; High Frequency Driver: SSD1445-16; Replacement HF Diaphragm CD1445-16		
Finish:		Black (RAL9010) or White (RAL9011) paint		
Mounting:		12 x M6 UMH points; 2 x M10 u-bracket nutplate. Optional: UBRKT/CT61B (black), UBRKT/CT61W (white)		
Dimensions:		7-7/8" w x 16" h x 9-3/8" d 200 mm w x 406 mm h x 238 mm d		

SA625 Amplifier Specifications

	SA625-A	SA625-RN	SA625-RD1 (Ultimo)	SA625-RD (Brooklyn II)
Audio Connections:	2 x XLR-3, In & Loop-out, Analog	2 x XLR-3, In & Loop-out, Analog and AES	2 x XLR-3, In & Loop-out, Analog and AES 1 x RJ45 Dante Ethernet	2 x XLR-3, In & Loop-out, Analog and AES 2 x RJ45 Dante Primary & Secondary Ethernet
Latency:	6.25 ms	6.25 ms	6.25 ms Analog & AES 6.25 ms + Dante transport latency	6.25 ms Analog & AES 6.25 ms + Dante transport latency
User DSP:	None	Eight fully parametric filters, high and low shelf, high and low pass filters, delay to 340 ms.		
Software:	None	RHAON II	RHAON II and Dante Controller	
Max. Input Level:	+22 dBu, Analog	+22 dBu, Analog, 0 dBFS digital	+22 dBu, Analog, 0 dBFS digital	+22 dBu, Analog, 0 dBFS digital
Network Connections:	None	2 x RJ45, Looping Ethernet/RHAON	2 x RJ45, DANTE/Looping Ethernet/ RHAON (Note: Dante and RHAON share a single Ethernet network.)	2 x RJ45 Dante Primary & Secondary Ethernet/RHAON (Note: Dante and RHAON share a single or redundant Ethernet network.)
Power Output:		LF= 250 watts, @ 16 ohms / HF = 125 watts @ 16 ohms. Multi-band peak and thermal limiting on both channels protects the drivers. Neutrik NL4 provides processed, loop-out to second CX61. (Looped-to loudspeaker must be in bi-amp mode.)		
Mains Voltage:		100-240 volts, 50/60 Hz auto-switching		
Power Consumption:		Idle: 200 mW. 1/8 power: 120 W (onset of limiting) 1/3 power: 240 W (hard limiting)		
Power Connector:		Neutrik powerCON TRUE-1		
Temperature Limits		Max.: 140° F/60° C, with no direct sun exposure; Min.: -22° F/-30° C; leave unit on to keep interior warm below 32° F/0° C.		

Note: All analog inputs and outputs comply with AES Standard 48-2005 on interconnecting, grounding and shielding.

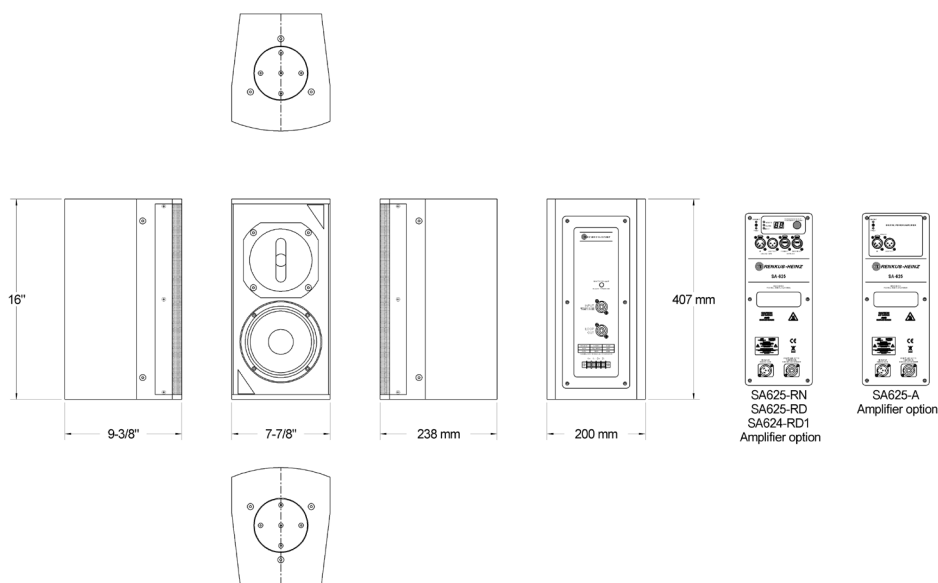

Renkus-Heinz, Inc., 19201 Cook Street, Foothill Ranch, CA 92610-3501, USA
Tel: +1 949-588-9997 • Fax: +1 949-588-9514
sales@renkus-heinz.com • www.renkus-heinz.com

RH 843 JUNE 2019